

Other Products

- ***HF WELDERS***
- ***PTFE WELDERS***
- ***KEDER MACHINES***
- ***PORTABLE TONG
TYPE HF WELDERS***
- ***IMPULSE SEALERS***



Stationary HF WELDERS



Movable on Track HF WELDERS



WELDON HF

Unit #'s 200, 201, 202 & 203, Building A2
Babosa Industrial Park,
Saravali Village, Bhiwandi,
Dist Thane PIN 421302 (INDIA)

Phone: +91 9167650247
Phone: +91 9167650248
E-mail: info@weldonhf.com

WELDON HF



Introducing.....

CUTTING SYSTEMS

Suitable for Rolls of...

PVC/PVC Coated Fabrics

HDPE/ Woven Fabrics


Paper/Laminated

PTFE/Silicone Coated Fabrics &

Many More

Call: +91 9167650242

CUTTING SYSTEMS WITH Roll Managers

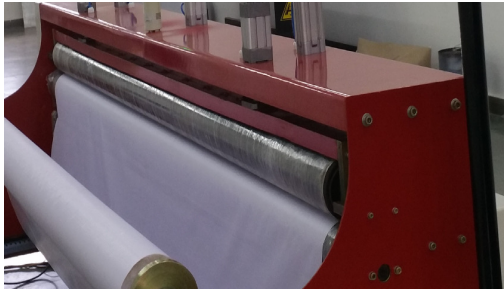

WELDON HF manufacturers of HF Welders has pleasure to introduce **CUTTING SYSTEMS** for high speed/precise cutting with automatic metering of fabrics from rolls.

The industry is facing huge challenges to cut sheets from rolls. The machines are also available with a roll manager to load at one instant – 5 - (five) rolls. Added advantage is the inventory software to manage the inventory information on the rolls, number of cut sheets and roll information all automatically managed for the user.

Specifications	Models	RCM1200	RCM1600	RCM2000	RCM2500	RCM3200
Maximum Roll Width		1200 mm	1600 mm	2000 mm	2500 mm	3200 mm
Maximum Roll Diameter		600 mm				
Maximum Fabric Thickness		8 mm				
Maximum Fabric Travel Speed		20 m/minute				
Linear Cutting speed		0.5 m/second				
Minimum cut length		50 mm				
Maximum cut length		100 m				
Accuracy		+/- 1 mm				
Maximum no. of active rolls		333				
Fabric Drive		Servo Drive				
Controller		Programmable Logic Controller				
HMI						
Cutting Tools		Choose one: Rotating Blade/Ultrasonic/Impulse/Many More				
Connectivity		Remote access through wireless router				
Mobile App		Optional				
Cutting Data Storage		On USB pen drive				
PC Software		Available to provide inventory system for rolls				
Cut sheet marking		Optional				
Type		Inkjet				
Marked data		Date, Time, User Name, Fabric Type, Cut length				
Power Supply		Single phase 230 V +/- 2%, 50/60 Hz + Neutral + Earth				
Compressed air		20 Liters/min at Pressure of 8 Kg/sq. cm.				